

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
18 December 2003 (18.12.2003)

PCT

(10) International Publication Number
WO 03/103956 A1

- (51) International Patent Classification⁷: **B32B 27/32**, B65D 65/42, C08K 3/00, 5/00
- (21) International Application Number: PCT/CA03/00894
- (22) International Filing Date: 11 June 2003 (11.06.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
2,390,278 11 June 2002 (11.06.2002) CA
- (71) Applicant (for all designated States except US): **INTER-WRAP INC.** [CA/CA]; 32923 Mission Way, Mission, British Columbia V2V 6E4 (CA).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **VIDO, Martin** [CA/CA]; 32961 Howthorne Avenue, Mission, British Columbia V2V 7C3 (CA).
- (74) Agents: **MCGRUDER, David, J.** et al.; Oyen Wiggs Green & Mutala, 480 - The Station, 601 West Cordova Street, Vancouver, British Columbia V6B 1G1 (CA).
- (81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— with international search report
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: PACKAGING MATERIAL FOR METAL

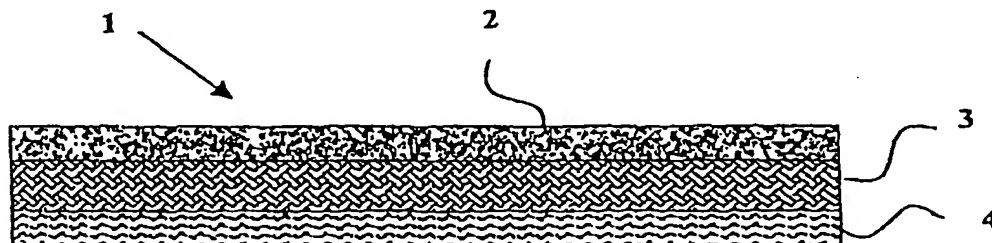

(57) Abstract: A multi-layered packaging material for metal with improved anti-corrosion properties is made from polyolefins, preferably polyethylene. The material has a high tensile strength middle layer comprising a woven scrim, preferably made of high-density polyethylene tapes with decitex from 500 to 2500 grams per 10,000 meters. The woven layer is laminated on the outer side to a layer of low-density polyethylene. The outer layer has very low moisture and vapor transmission rate and is almost impermeable. It protects the wrapped good from damaging elements in the atmosphere, including vapors and moisture. The middle layer is laminated on the inside to a polymer sheet, preferably low-density polyethylene, impregnated with a blend of corrosion inhibitors. The corrosion inhibitor blend comprises both volatile and contact corrosion inhibitors.

WO 03/103956 A1